


Flat Glass Water Gages and DuraStar™

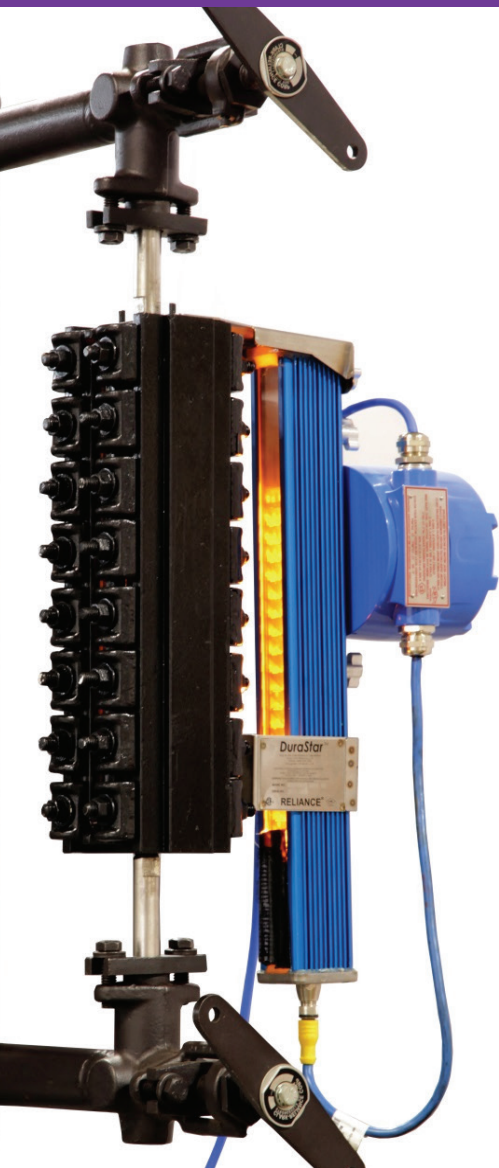

Reliance®
A PRODUCT OF CLARK-RELIANCE


Reliance[®]

Flat Glass Gages

The precision manufacturing of these time-tested designs assures outstanding performance and service life. Choose from single, double or up to six windows for ultimate visibility to meet your specifications.

FG Series Gages provide wide-body construction for added strength and rigidity. Tempered flat glass composition of premium quality to resist thermal shock. All glass is tested for surface trueness prior to assembly and is protected with a high quality mica shield for steam applications.

All models feature finger-clamps which impart a uniform, perpendicular load across the glass surface, assuring gasket tightness. This design allows easy dismantling for cleaning and servicing.

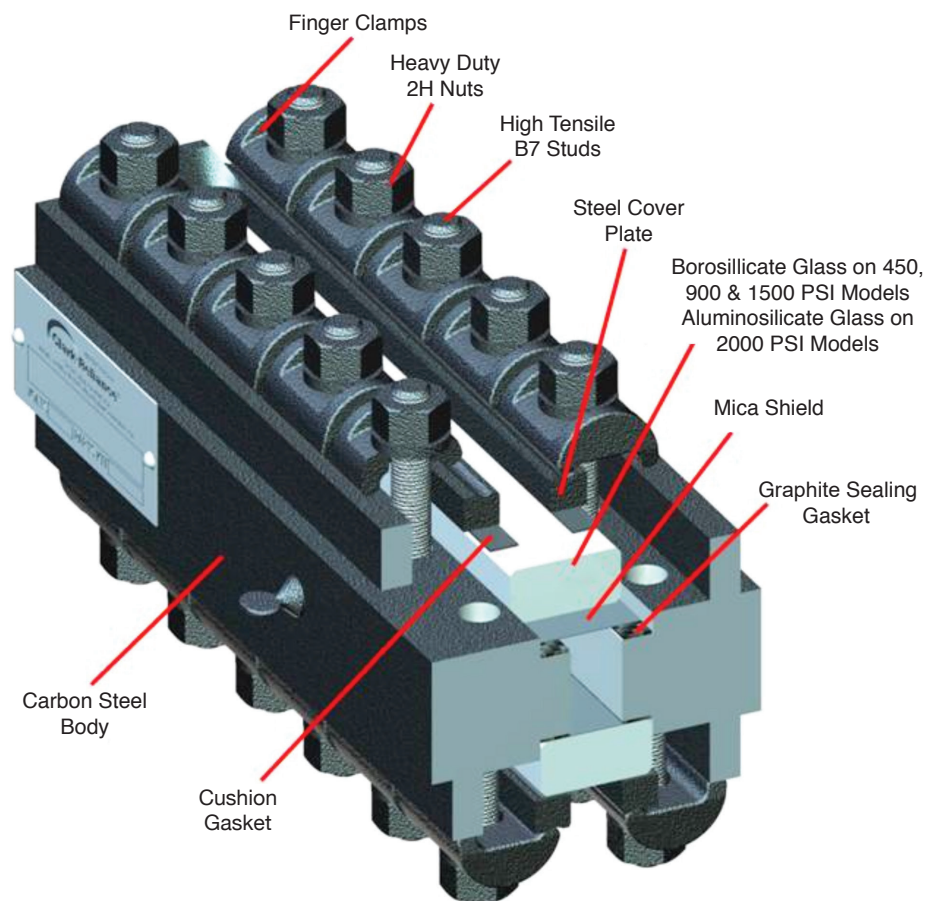

A window slot, 5/8" (15.9 mm) wide, provides high visibility gage reading. For many installations, Water Gage Illuminators are recommended to improve gage readability.

***Complies with ASME Section I Requirements**

Flat Glass Water Gages 450 – 2000 PSI


FG Series Flat Glass Gages feature four design classes:

To 450 PSI

(31 Bar G, 31.6 Kg/cm²)

SINGLE WINDOW GAGES						
MODEL NUMBER	VISIBILITY		MINIMUM WATER GAGE CENTERS			
			BG404S		SG854	
	INCHES	MM	INCHES	MM	INCHES	MM
FG404	6-5/8	168	14	356	17	432
FG405	7-3/4	197	16	406	18	457
FG406	9	229	17	432	20	508
FG407	10-1/8	257	18	457	21	533
FG408	11-3/4	298	20	508	22	559
FG409	12-1/2	318	20	508	23	584
DOUBLE WINDOW GAGES						
FG466	15	381	24	610	28	660
FG477	17-1/2	444	26	660	29	737
FG488	20	508	29	737	31	787
FG499	21-1/2	546	30	762	33	838

Three or more window models available upon request.



To 900 PSI

(62.1 Bar G, 63.27 Kg/cm²)

SINGLE WINDOW GAGES						
MODEL NUMBER	VISIBILITY		MINIMUM WATER GAGE CENTERS			
			BG404S		SG854	
	INCHES	MM	INCHES	MM	INCHES	MM
FG904	6-5/8	168	17			432
FG905	7-3/4	197	18			457
FG906	9	229	20			508
FG907	10-1/8	257	21			533
FG908	11-3/4	298	22			559
FG909	12-1/2	318	23			584
DOUBLE WINDOW GAGES						
FG966	15	381	26			666
FG977	17-1/2	444	29			737
FG988	20	508	31			787
FG999	21-1/2	546	33			838

Minimum centers quoted apply to Clark-Reliance Gage Valve SG800 Series.




To 1500 PSI

(103.4 Bar G, 105.5 Kg/cm²)

SINGLE WINDOW GAGES						
MODEL NUMBER	VISIBILITY		MINIMUM WATER GAGE CENTERS			
			INCHES		MM	
	INCHES	MM	INCHES	MM	INCHES	MM
FG1504	6-5/8	168		20		508
FG1505	7-3/4	197		21		533
FG1506	9	229		23		584
FG1507	10-1/8	257		24		609
FG1508	11-3/4	298		25		635
FG1509	12-1/2	318		26		660
DOUBLE WINDOW GAGES						
FG1566	15	381		29		737
FG1577	17-1/2	432		31		787
FG1588	19-1/2	495		33		838
FG1599	21	533		35		889

Three or more window models available upon request.
Minimum centers apply to Clark-Reliance Gage Valve SG800 Series.




To 2000 PSI

(138 Bar G, 140.6 Kg/cm²)

SINGLE WINDOW GAGES						
MODEL NUMBER	VISIBILITY		MINIMUM WATER GAGE CENTERS			
			INCHES		MM	
	INCHES	MM	INCHES	MM	INCHES	MM
FG2004	6-5/8	168		15		381
FG2005	7-3/4	197		16		406
FG2006	9	229		17		432
FG2007	10-1/8	257		19		483
DOUBLE WINDOW GAGES						
FG2055	12	305		20		508
FG2066	15	381		23		584
FG2077	17	432		25		635

Three or more window models available upon request.
Minimum centers apply to Clark-Reliance Gage Valve Series SG777.
All FG2000 Series Gages are supplied with flanged connections.

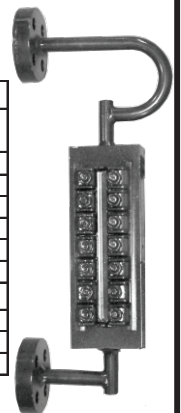

Reliance®


Sizing Multiple Section Gages

Maximum Water Gage Visibility for Flat Glass Gages

Dimensions - Inches (mm)

# of Sections	Glass Size				
	5	6	7	8	9
Three	21.25 (540)	25 (635)	28.375 (721)	33.25 (845)	35.5 (902)
Four	28 (711)	33 (838)	37.5 (953)	44 (1118)	47 (1194)
Five	34.75 (883)	41 (1041)	46.625 (1184)	54.75 (1391)	58.5 (1486)
Six	41.5 (1054)	48 (1219)	55.75 (1416)	65.5 (1664)	70 (1778)

- 1" (25.4 mm) minimum overlap on all multiple section designs
- Size 8 and 9 are not available for FG2000 series

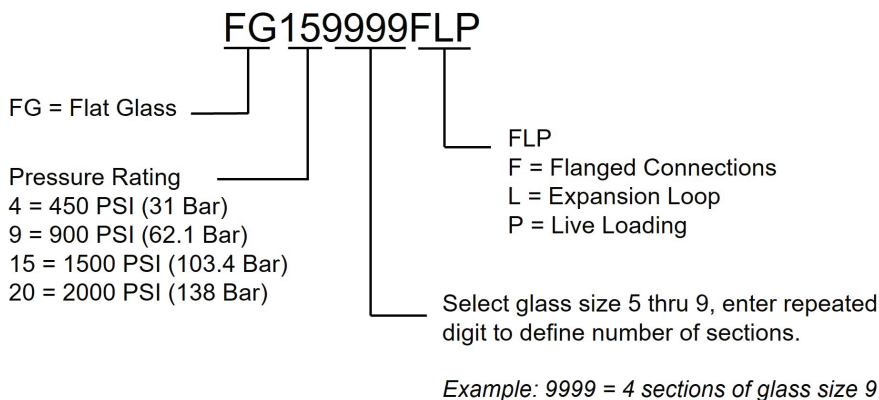


Notes:

1. Gages with more than 3 sections will be offered with flanged connections.
2. All FG2000 Series Gages are supplied with flanged connections.


Reliance®

Live Loading Options



For longer life on FG1500/FG2000 series installed on applications with frequent cycling.

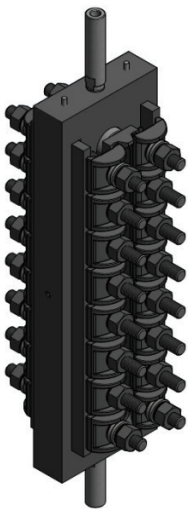

Spring washers installed only on the 4 corners on one side.

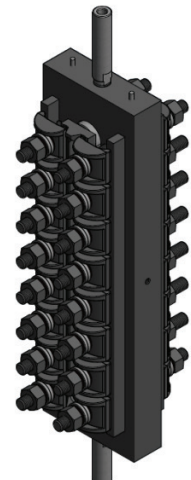

Spring washers installed on all studs on one side of the gage.

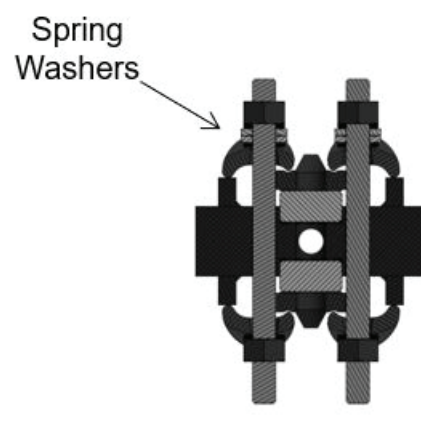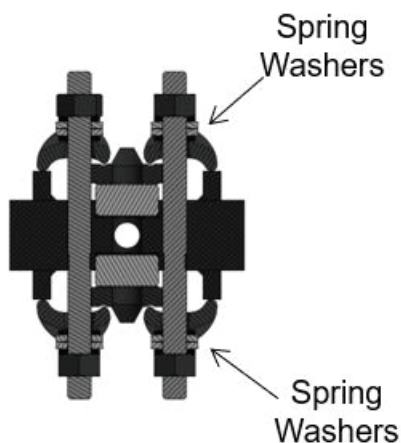


The longer studs with spring washers are provided on both sides of the gage on the 4 corner studs because the corner studs thread into the gage body to aid with assembly. Spring washers are needed only on one side of the middle studs, since these studs slide through the gage body.

Specify live loading by adding a "P" suffix to the gage model number.

DuraStar™

Flat Glass Gage LED Illuminator

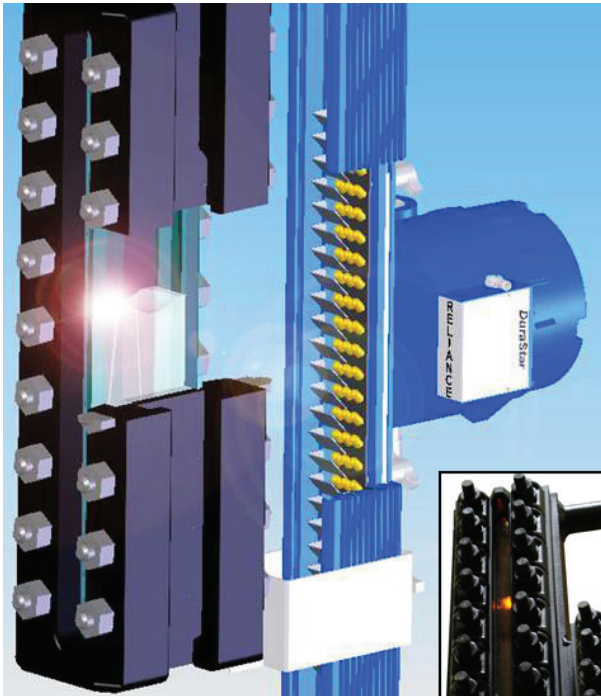

The DuraStar™ Illuminator uses three columns of “directed” amber color LED’s to create a brilliant star-like image at the water level. TheDuraStar™ easily attaches to new or existing Reliance Flat Glass gages without the use of tools.



Explosion Proof Power Supply

Intrinsically Safe Lighting Circuit

DuraStar™ Model No.	Fits Gage Glass	Length (Inches)	Length (mm)	Wt (lb)
DS1000-1411-1	FG404 or FG904	11.75	298	7.50
DS1000-1511-1	FG405 or FG905	13.00	330	7.75
DS1000-1611-1	FG406 or FG906	14.50	368	8.00
DS1000-1711-1	FG407 or FG907	15.75	400	8.25
DS1000-1811-1	FG408 or FG908	17.25	438	8.50
DS1000-1911-1	FG409 or FG909	18.00	457	8.75
DS1000-1411-2	FG1504 or FG2004	13.00	330	7.75
DS1000-1511-2	FG1505 or FG2005	14.50	368	8.00
DS1000-1611-2	FG1506 or FG2006	15.75	400	8.25
DS1000-1711-2	FG1507 or FG2007	16.50	419	8.50
DS1000-1811-2	FG1508	18.00	457	8.75
DS1000-1911-2	FG1509	19.00	483	9.00

DuraStar™ Nema 4, 4X (All Models)

DS1 = For NON- Classified “Ordinary” Areas
 DS5 = For Classified Areas
 DX5 = ATEX Approved Models

Gage Window Size (4 thru 9)

Power Source
 1 = 115 VAC 50/60 Hz
 2 = 230 VAC 50/60 Hz

DS1000 - 1 9 1 1 - 1

Gage Series

1 = FG450 - FG900
 2 = FG1500 - FG2000

Power Supply

1 = Single Illuminator with one power supply
(Ordinary Locations)
 2 = Double Illuminator for two section gages with one power supply **(Ordinary Locations)**
 H = Single Illuminator with one power supply **(Classified Locations)**

Notes:

- For gages with three or more sections, combine single and double illuminators to minimize power supply requirements.
- For remote mounting of power supply, specify Part No. V20601 for a 6.5' power cable extension. Other lengths on request.

DuraStar™

Flat Glass Gage LED Illuminator

The Most Dependable LED Illuminator for all Reliance® Flat Glass Level Gages

- High Contrast
- Superior Visibility Day or Night
- Field Upgradable
- Maintenance Free
- Long Life ~100,000 hrs.
- No Heat Generation
- Versatile
- Continuous or "On-Demand"
- Amber LED's for high intensity "star-like" image of the water line
- Longest Field-of-View
- Pays for itself in electricity savings alone!
- No weather-proof illuminator hood used
- Models for Ordinary or Classified locations
- ATEX models available

Contact your local representative or a Reliance Applications Engineer to configure a DuraStar™ for your transparent glass level gages.



SPECIFICATIONS FOR ORDINARY LOCATION MODELS

Power Supply:	100-277 VAC @ 50/60 Hz* 100-240 VAC @50/60Hz
Power Consumption:	320 mA @ 100 VAC
Est. Life:	100,000 Hours (continuous)
Agency Approvals:	FM Ordinary Locations CFM Ordinary Locations
Recommended Wire Size:	12AWG- 18AWG
Max dist. from power supply to light:	700ft. (216m)
Ambient Temperature:	-40F (-40C) to 160F (70C)
Electrical Connection:	3/4" FNPT

*Voltage for North America Only

SPECIFICATIONS FOR HAZARDOUS LOCATION MODELS

Power Supply:	115 or 230 VAC @ 50-60 Hz
Power Consumption:	< 250 mA @ 115 VAC < 125 mA @ 230 VAC
Est. Life:	100,000 Hours (continuous)
Wire Size:	Min 18AWG (.75mm ²) Max 12AWG (4mm ²)
Max dist. from power supply to light:	72ft (22M)

Hazardous Location Approvals

US/Canada:



Class I, Division 1, Groups B – D T4
Class I, Zone 1, AEx db [ib] IIB+H2 T4 Gb
Class I, Zone 1, AEx ib IIB+H2 T4 Gb
Ex db [ib] IIB+H2 T4 Gb
Ex ib IIB+H2 T4 Gb
-40°C ≤ Tamb ≤ +60°C

ATEX:



II 2(2) G Ex db [ib] IIB+H2 T4 Gb (Power Supply)
II 2 G Ex ib IIB+H2 T4 Gb (Lights)
-40°C ≤ Tamb ≤ +60°C

IECEX:




Ex db [ib] IIB+H2 T4 Gb (Power Supply)
Ex ib IIB+H2 T4 Gb (Lights)
-40°C ≤ Tamb ≤ +60°C

From the World's Largest Selection Of Boiler Instrumentation and Control Devices



Eye-Hye® SmartLevel™
Local and Remote Indicators

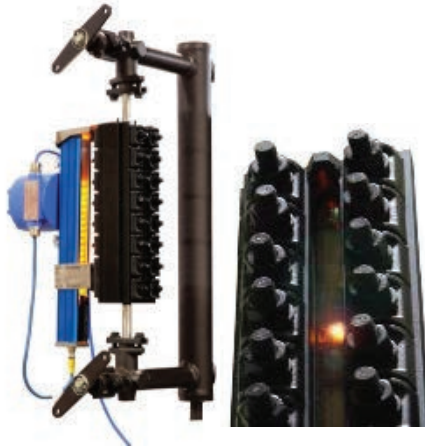

Flat Glass Gages
and Durastar™
Illuminators



LevelMax
Systems



Simpliport® 180
Water Gage System

Maintain Optimum Performance and
Accuracy with OEM Parts

Critical spare parts for overnight delivery,
direct from the manufacturer.



clark-reliance.com/parts



16633 Foltz Parkway, Strongsville, OH 44149 USA Phone: 440.572.1500
www.clark-reliance.com RelianceAppEng@clark-reliance.com www.relianceboilertrim.com

